

# CLARIS AROMA S MINERALIZATION

Hybrid cartridge for mineralization and filtration of ingredient water





# CLARIS AROMA S MINERALIZATION

Hybrid cartridge for mineralization and filtration of ingredient water

4339-62



The Aroma has been specially developed for the mineralization and taste optimization of coffee water.

The addition of magnesium ensures optimal coffee taste extraction, while the integrated purification stage removes undesired off-flavors.

Ideally suited for pipe-connected coffee machines in soft water areas or after RO.

## FEATURES BENEFITS

- ▶ Active mineralization through magnesium
- ▶ Suitable for hot water applications with water hardness <math>< 5^{\circ}\text{dH}</math>
- ▶ Balanced coffee aroma even with water low on minerals
- ▶ High quality mineral salts from Europe with FDA approval
- ▶ Stable mineralization regardless of the line pressure
- ▶ Certified for food contact
- ▶ Efficient reduction of harmful substances, chlorine and unpleasant odors

## INSTALLATION TIPS

- ▶ If mounting vertically to a wall, securely connect the mounting bracket to the wall using suitable screws.
- ▶ Water pressure at the filter system inlet must not exceed 8 bar (116 psi). A pressure reducer valve must be installed on the water supply side of the filter system if the inlet pressure exceeds 8 bar (116 psi).
- ▶ Shut-off valve must be installed upstream of the filter.

## OPERATION TIPS

- ▶ Change the cartridges when its pre-calculated water volume has been reached or at least once per year.
- ▶ Always flush the filter cartridge at time of installation and cartridge change.

## SIZING


- ▶ Service Flow Rate: Maximum 2 Lpm (0.5 gpm)
- ▶ Rated Capacity: 1.800 L (475 gallons)



# CLARIS AROMA S MINERALIZATION

Hybrid cartridge for mineralization and filtration of ingredient water

4339-62

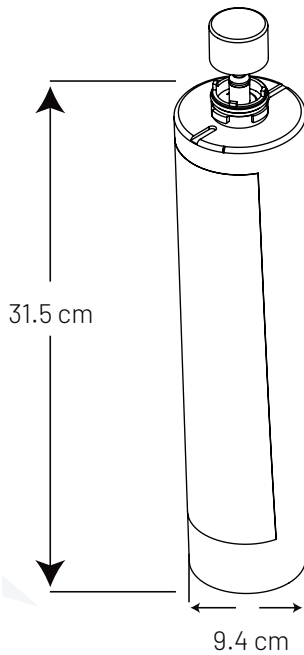

## SPECIFICATIONS

- ▶ **Service Flow Rate**  
Maximum 2 Lpm (0.5 gpm)
- ▶ **Rated Capacity**  
1.800 L (475 gallons)
- ▶ **Pressure Requirements**  
2-8 bar (29-116 psi), no shock
- ▶ **Temperature Limits**  
4-30°C (39-86°F)
- ▶ **Overall Dimensions**  
31.5 cm x 9.4 cm (12.39" L x 3.74" D)

[www.pentair.eu](http://www.pentair.eu)

Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit [www.pentair.com/en/registrations.html](http://www.pentair.com/en/registrations.html). Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.