


TECHNICAL SHEET

SHG GLASS FIBER
PLEATED CARTRIDGES



TECHNICAL SHEET

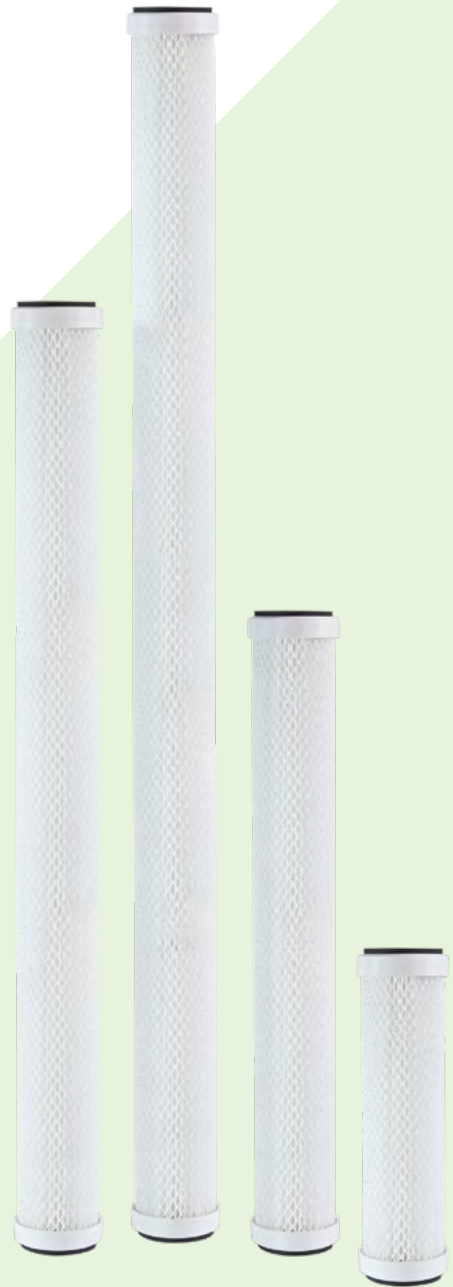

PENTAIR SHG GLASS FIBER PLEATED CARTRIDGES

TECHNICAL CHARACTERISTICS


- Temperature rating: 4.4 - 79.4°C
- Filter media: fiber glass
- Gasket: neoprene
- Applications: high temperature and aggressive chemical applications



PRODUCT SPECIFICATIONS

Model	Maximum dimensions (diameter x H)	Micron rating (nominal)
SHG0.5-9AN	60 mm x 229 mm	0.5
SHG3-9AN	60 mm x 229 mm	3
SHG0.5-20AN	60 mm x 508 mm	0.5
SHG3-20AN	60 mm x 508 mm	3
SHG0.5-30AN	60 mm x 762 mm	0.5
SHG3-30AN	60 mm x 762 mm	3
SHG0.5-40AN	60 mm x 1016 mm	0.5
SHG3-40AN	60 mm x 1016 mm	3

PERFORMANCE CHARACTERISTICS - PRESSURE DROP VS FLOW RATE*

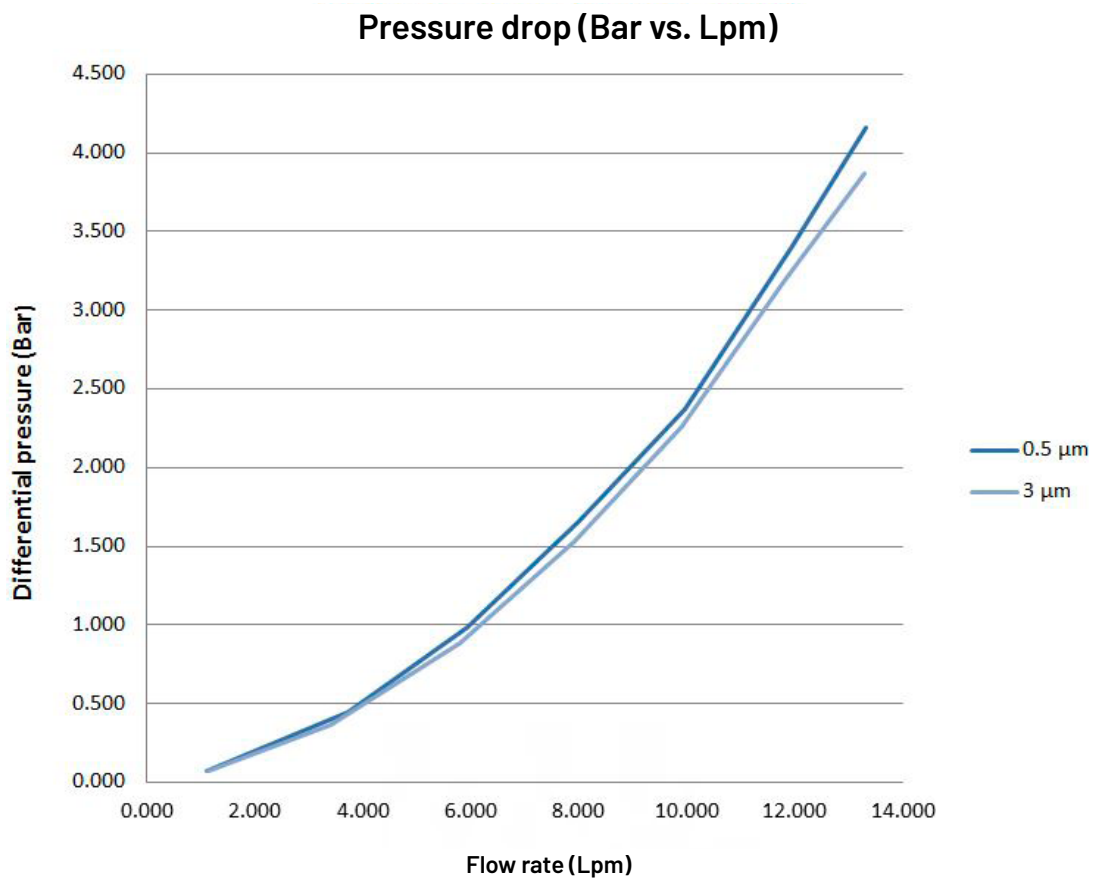

*Based on manufacturer's internal testing.

www.pentairaqueurope.com